AUTODOC CLUB

How to change pollen filter on **Toyota Yaris P1** – replacement guide

VIDEO TUTORIAL



Important!

This replacement procedure can be used for:
TOYOTA LAND CRUISER 150 (KDJ15_, GRJ15_) 4.0 V6 VVT-i (GRJ150_, GRJ125_), TOYOTA LAND CRUISER 150 (KDJ15_, GRJ15_) 3.0 D-4D (KDJ155_, KDJ150_), TOYOTA Yaris / Vios Saloon (_P9_) 1.5 (NCP93), TOYOTA Previa / Estima (_R1_, _R2_) 2.4 (TCR1_), TOYOTA CELICA (ST20_, AT20_) 1.8 i 16V, TOYOTA Previa / Estima (_R1_, _R2_) 2.4 4WD (TCR2_), TOYOTA Yaris Hatchback (_P9_) 1.3 VVT-i (NCP90_, SCP90_), TOYOTA CELICA (ST20_, AT20_) 2.0 i 16V (ST202_), TOYOTA LAND CRUISER 100 (UZJ100) 4.7, TOYOTA LAND CRUISER 100 (UZJ100) 4.2 TD, TOYOTA LAND CRUISER 150 (KDJ15_, GRJ15_) 2.7 (TRJ150_, TRJ155_), TOYOTA LAND CRUISER 150 (KDJ15_, GRJ15_) 4.0 V6 VVTi (GRJ150_), TOYOTA PREVIA III (ACR5_, GSR5_) 3.5 4WD (GSR55W), TOYOTA Harrier II (XU30) 2.4 4WD (ACU35_), TOYOTA Harrier II (XU30) 3.3 Hybrid 4WD (MHU38_), (+ 102)

The steps may slightly vary depending on the car design.

Replacement: pollen filter – Toyota Yaris P1. AUTODOC experts recommend:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- Warning! Shut down the engine before starting any work – Toyota Yaris P1.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1 Open the glove box.



2 Remove the glovebox.




Replacement: pollen filter – Toyota Yaris P1. Tip:

- Be careful to avoid damaging the glove compartment fasteners.

3 Remove the cabin air filter housing.



4 Remove the filter element from the filter housing.

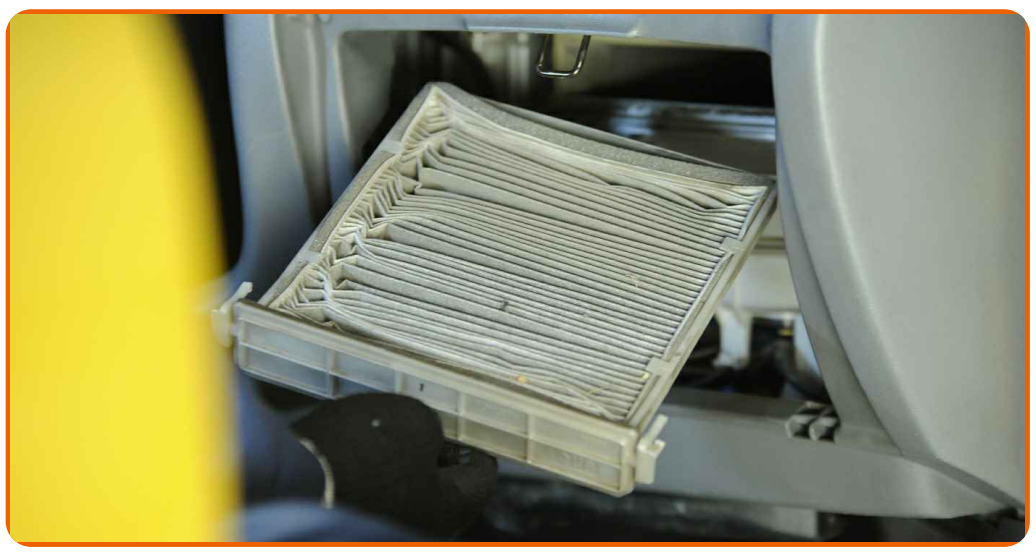

Replacement: pollen filter – Toyota Yaris P1. AUTODOC recommends:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

5 Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.



AUTODOC recommends:

- Replacement: pollen filter – Toyota Yaris P1. Be sure to position the filtering element correctly. Avoid misalignment.
- Follow the air flow direction arrow on the filter.
- Take care to only use quality filters.

6 Install the cabin air filter housing.



7 Install the glove box.



8 Close the glove box.



9 Switch on the ignition.

10 Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.



11 Switch off the ignition.

WELL DONE!

VIEW MORE TUTORIALS

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.